



# Butler

### AUTOMATIC TYRE CHANGER



Tool locking with automatic setting of appropriate distance from the rim.



The pedal assembly can be removed as an integral unit allowing easy servicing.



Tool with integrated protection for alloy rims. Adjustable angle and rotation.

Jointed and shaped blade to facilitate bead breaking without damaging the rim or tyre.




1200 Nm

Max torque turntable

#### STANDARD



G84A16  
Lubricator

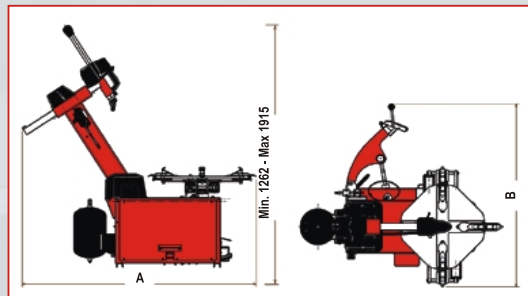

DIMENSIONS	HP341.20 HP341.20.FI
Max Width B	1290 mm
Max Depth A	1768 mm

TECHNICAL DATA	
Inner clamping	12"/22,5"
Outer clamping	10"/20"
Tool working span	10"-24"
Max wheel diameter	1050 mm (41")
Max wheel width	304 mm (12")
Bead breaker force	3600 kg (8000 lbs)
Electric motor	230/400V 50Hz 0,75kW
Chuck rotation speed	7,3 rpm



# TYRE CHANGERS



EQUIP MASTERS CORPORATION

B 211, Arjun Centre, Plot No. 231, Govandi Station Road, Govandi East, Mumbai - 400 088.

Tel.: +91-22-2550 3037 / 250 3038 • Email: sales@dentmasterindia.com

Web: www.dentmastersindia.com