

# DS35EX Double Scissor Lift



Composite polymer rubber adapter pads are placed on platforms for vehicle spotting.  
Shown: #FJ2428 / 40mm adapter pad

## Vehicle Spotting / Adapter Contact Options

Consult users manual for proper adapter usage and options.



**Included with the DS35EX**  
Set of four 12.7mm  
Flat Polymer Rubber Pad Adapters



Set of four 40mm  
Flat Polymer Rubber Pad Adapters



Set of four 80mm  
Flat Polymer Rubber Pad Adapters


## Specifications / DS35EX

Lifting Capacity	3500kg
Maximum Rise	1940mm surface mounted* 1835mm recessed mounted
Lowered Height	105mm
Width Overall	2010mm
Overall Length	2358mm
Extension Arm Length	528mm
Width Between Platforms	750mm(900mm for BMW)
Platform Length	1500mm
Ramp Length	330mm
Motor / Voltage	Single Phase - 50/60Hz, 3KW,208-230V 3 Phase - 50/60Hz, 3KW,380V
Time of Full Rise	43 seconds

\* Rise measures floor to top of runway at full stroke.



Lifts are available in blue and gray. Control consoles are gray only.

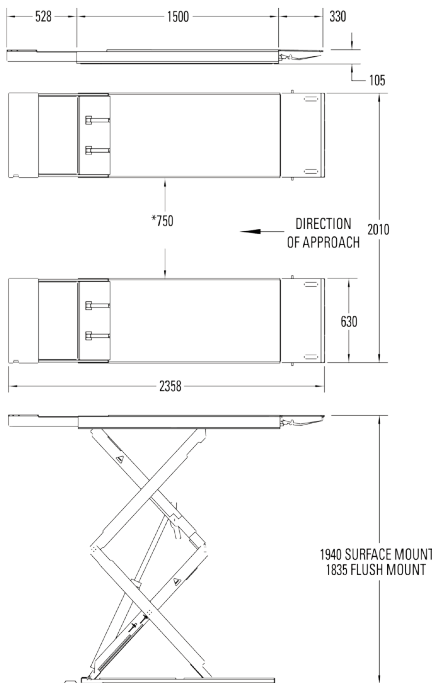

# DS35EX Double Scissor Lift

3500KG CAPACITY DRIVE OVER PAD SERVICE LIFT



Shown:DS35EX

**Low profile double scissor  
designed with the industry's  
most innovative equalization .**



## Rotary Lift Consolidated (Haimen) Co.,Ltd

No1388,East Xiushan Road,Haimen,Jiangsu Province,China  
Australia/New Zealand: p 86.21.60812756  
South East Asia: p 91.80.41123421.26  
India: p 91.120.4099.555  
www.vsg-asia.com

**EQUIPMASERS**  
corporation

**B-211 , Arjun Centre ,  
Govandi Station Road , Govandi,  
Mumbai - 400088 , Maharashtra.  
Tel : +91-22-25503037 / 08 Extn 22  
E Mail : info@dentmastersindia.com  
Website : www.dentmastersindia.com**

**The World's Most Trusted Lift™**



**Engineered for quick service, fast repair work, and shops with small spaces.**  
**This compact, lightweight scissor structure offers years of service.**



Shown: DS35EX

### Feature Checklist:

- ✓ Low drive-over clearance allows for effortless positioning of low profile vehicles
- ✓ Oversized platforms accommodate a wide range of vehicles and pickup points
- ✓ 1940mm rise height creates working space for the tallest technicians.
- ✓ Hinged ramps drop down to a 65 degree angle for easy access to wheel service
- ✓ Patent pending composite high strength steel construction delivers long life
- ✓ Surface or flush mounted option
- ✓ CE Certified



Shown: DS35EX



Platforms feature a durable, powder coated diamond plate surface.




Easy to adjust platform extensions adapt for a wide range of vehicle lengths.(Stroke:528mm)



Hinged ramps fold 65 degrees down and away, allowing for more access to perform wheel and brake service.




Lift dampener provides soft landing when lift is lowered to the ground.

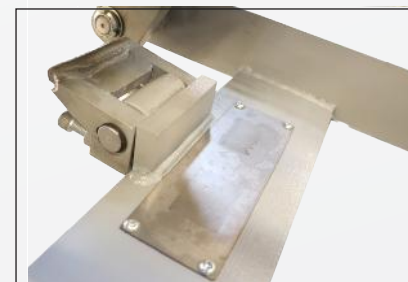

High strength, composite steel scissor legs.



Low profile design with integrated folding ramps accomodate a variety of vehicle types.

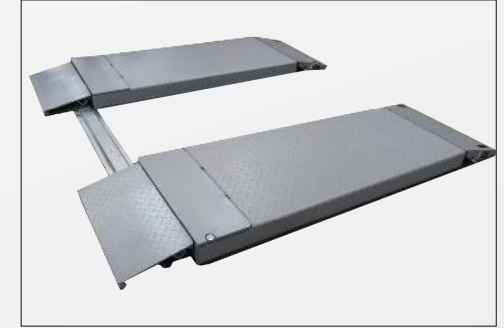

Hot dipped galvanized platform base protects flush mounted lift components from corrosion.



The control console features an integrated hydraulic unit and thus considerably helps reduce the installation effort.



Intuitive, easy to use control console design.

